


Specification Sheet

Lubricated Air Compressor

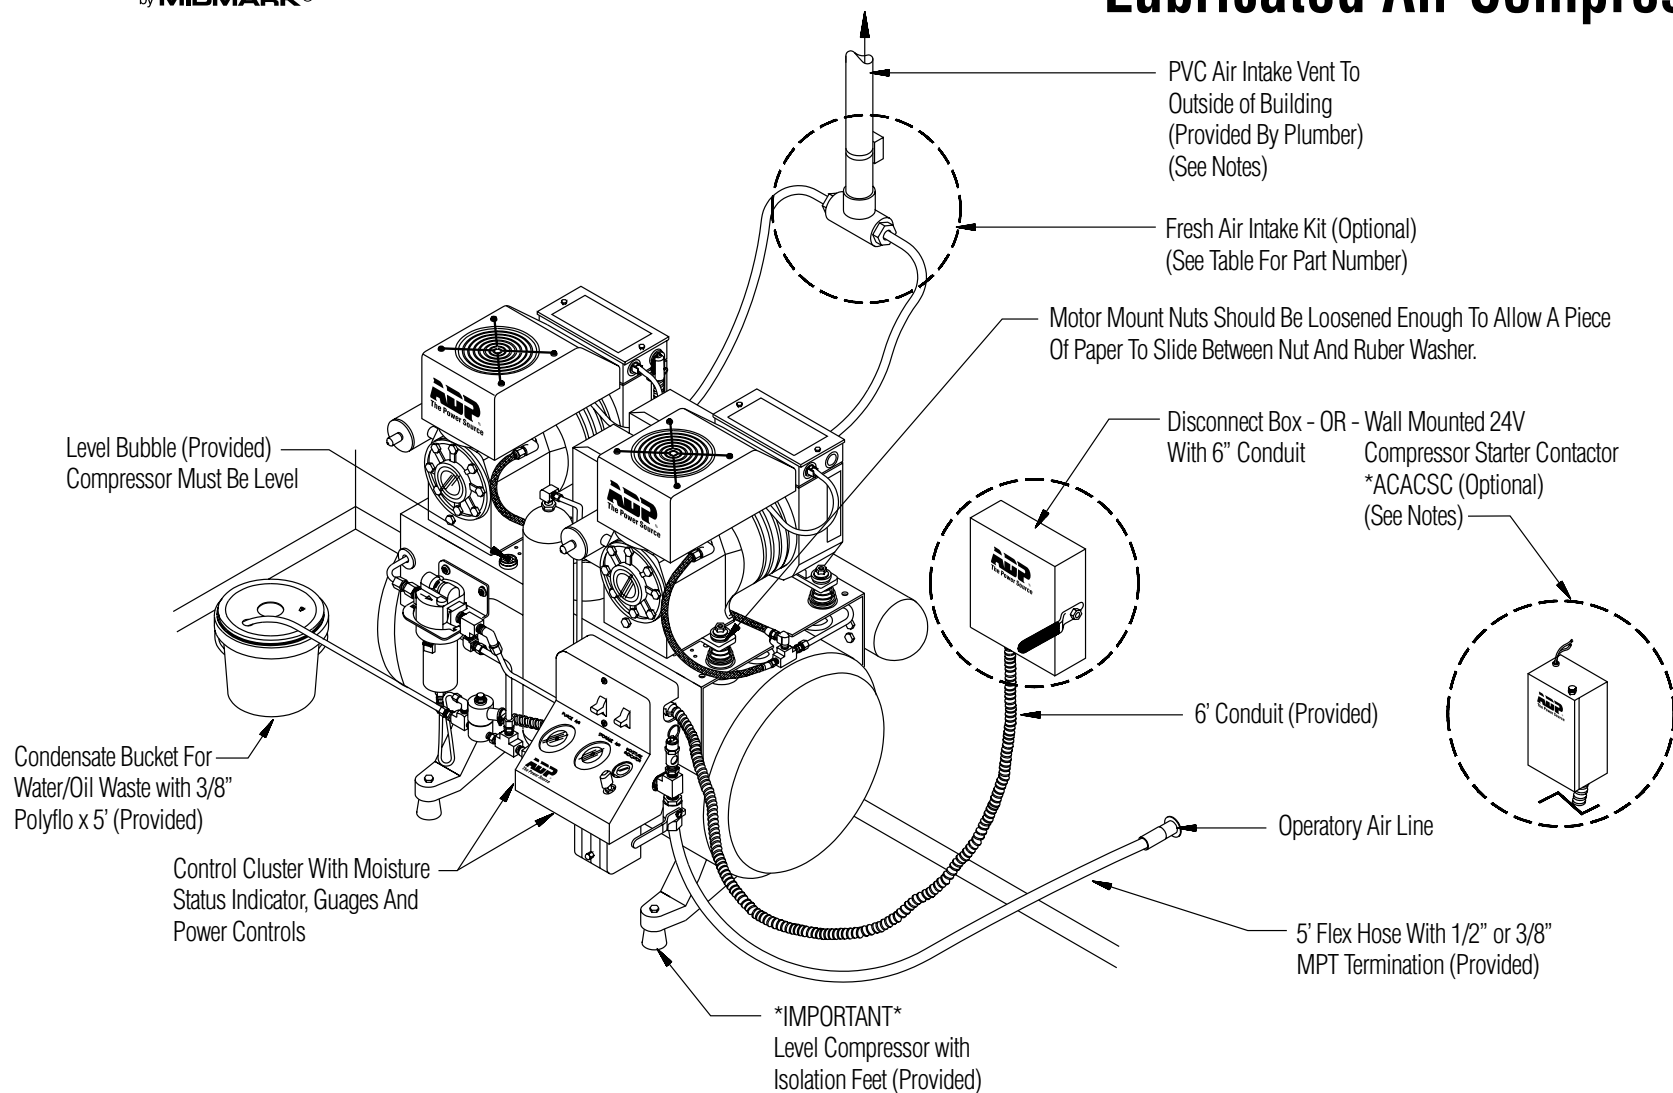

Apollo Dental Products, Inc.

245 West Dakota Ave. • Clovis, CA 93612 • (559) 292-1444 • (800) 233-4151 • Fax: (559) 292-1555 • E-Mail: support@apollodental.com • www.apollodental.com

AMM40305 Rev. 12/00

Specification Sheet

Lubricated Air Compressor

Technical Service
(800) 233-4151

Number Of Heads	Models	Max Number Users	CFM@80PSI	Total Horsepower	Tank Capacity (Gals)	Voltage	Total Amps	Recommended Breaker Size	Sound Level (DB-A)	Width (In.)	Depth (In.)	Height (In.)	Weight (lb.) (Shipping)	Wall Mount Desiccant Air Dryer	Refrigerated Air Dryer	Compressor Starter Contactor	Fresh-Air Intake	Fresh-Air Intake Pipe Size (in.)	Automatic Tank Drain Valve
1	SL11	1	3.2	3/4	7	115	10.2	20	66	23	17	30	198	ACADAD5	ACARAD5	ACACSC	ACA85370	1 1/2	ACAAD1
	SL11D	1	3.2	3/4	7	115	10.2	20	66	23	17	30	223	N/A	N/A	ACACSC	ACA85370	1 1/2	N/A
	SL12	1	3.2	3/4	7	208-230	5.2	20	66	23	17	30	198	ACADAD5	ACARAD10	ACACSC	ACA85370	1 1/2	ACAAD1
	SL12D	1	3.2	3/4	7	208-230	5.2	20	66	23	17	30	223	N/A	N/A	ACACSC	ACA85370	1 1/2	N/A
	SL21	2	4.7	1.0	10	115	13.8	20	68	23	18	31	207	ACADAD5	ACARAD10	ACACSC	ACA85370	1 1/2	ACAAD1
	SL21D	2	4.7	1.0	10	115	13.8	20	68	23	18.5	31	230	N/A	N/A	ACACSC	ACA85370	1 1/2	N/A
	SL22	2	4.7	1.0	10	208-230	7.2	20	68	23	18	31	207	ACADAD5	ACARAD10	ACACSC	ACA85370	1 1/2	ACAAD1
	SL22D	2	4.7	1.0	10	208-230	7.2	20	68	23	18.5	31	230	N/A	N/A	ACACSC	ACA85370	1 1/2	N/A
2	TL31	3	6.4	1 1/2	15	115	20.4	30	69	33	19	31	326	ACADAD15	ACARAD10	ACACSC	ACA85375	1 1/2	ACAAD1
	TL31D	3	6.4	1 1/2	15	115	20.4	30	69	33	23	31	350	N/A	N/A	ACACSC	ACA85375	1 1/2	N/A
	TL32	3	6.4	1 1/2	15	208-230	10.4	20	69	33	19	31	326	ACADAD15	ACARAD10	ACACSC	ACA85375	1 1/2	ACAAD1
	TL32D	3	6.4	1 1/2	15	208-230	10.4	20	69	33	23	31	350	N/A	N/A	ACACSC	ACA85375	1 1/2	N/A
	TL41	4	9.4	2.0	20	115	27.6	40	71	34	20	33	345	ACADAD15	ACARAD10	ACACSC	ACA85375	1 1/2	ACAAD1
	TL41D	4	9.4	2.0	20	115	27.6	40	71	34	20	33	369	N/A	N/A	ACACSC	ACA85375	1 1/2	N/A
	TL42	4	9.4	2.0	20	208-230	14.4	20	71	34	20	33	345	ACADAD15	ACARAD10	ACACSC	ACA85375	1 1/2	ACAAD1
	TL42D	4	9.4	2.0	20	208-230	14.4	20	71	34	23	33	369	N/A	N/A	ACACSC	ACA85375	1 1/2	N/A
3	RL62	6	14.1	3.0	30	208-230	21.6	30	75	38	24	36	495	ACADAD15	ACARAD15	ACACSC	ACA85380	2	ACAAD1
	RL62D	6	14.1	3.0	30	208-230	21.6	30	75	38	28	36	545	N/A	N/A	ACACSC	ACA85380	2	N/A
4	QL82	8	18.8	4.0	40	208-230	28.8	40	79	42	26	40	703	N/A	ACARAD15	ACACSC	ACA85390	2	ACAAD1
	QL82D	8	18.8	4.0	40	208-230	28.8	40	79	42	30	40	753	N/A	N/A	ACACSC	ACA85390	2	N/A

Options: For compressor mounted, Compressor Starter Contactor, add "C" suffix to the compressor part number. (ie., TL42DC)

Notes: Remote fresh air intake air temperature must not exceed compressor room air temperature by more than 20° Fahrenheit. **Moisture will condense in the air intake line and enter the compressor head. Resultant contamination will cause compressor failure.** Compressor must be installed in a clean, dry, well ventilated area, on a solid, level floor. Ambient temperature must be within the range of 40° Fahrenheit minimum (4° Celcius) to 100° Fahrenheit maximum (38° Celcius). All Twin, Triple, Quad compressor motors must be "ON" during normal operating conditions. "D" denotes Desiccant Dryer equipped model.